




## 4024 Step ladder, double-sided accessible

- › Anodised stiles (no black aluminium wear).
- › Step depth 80 mm. Front step edges flush with stile.
- › Stable steel hinges.
- › Spreader lock provided by high-strength, 20 mm wide nylon straps.
- › Stable stiffening braces on first step.
- › Extra large ladder shoes extruded into the stile.

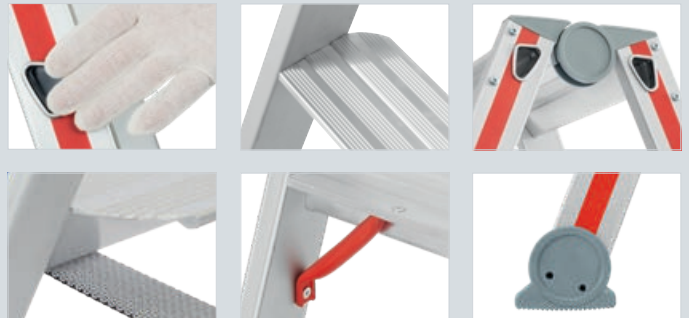

Number of steps		2×3	2×4	2×5	2×6	2×7	2×8
Stile	approx. mm	55	55	55	55	55	55
Length	approx. m	0.78	1.03	1.28	1.53	1.79	2.02
Standing height	approx. m	0.19	0.42	0.65	0.88	1.12	1.34
Working height	approx. m	1.69	1.92	2.15	2.38	2.62	2.84
Reach height	approx. m	2.19	2.42	2.65	2.88	3.12	3.34
Vertical height	approx. m	0.70	0.90	1.15	1.38	1.61	1.84
Width top/bottom	approx. mm	340/410	340/435	340/460	340/485	340/510	340/540
Base width	approx. m	0.75	0.90	1.10	1.30	1.50	1.65
Weight	approx. kg	3.6	4.5	5.5	6.7	8.0	8.8
EAN-Code		4019502339415	4019502339422	4019502339439	4019502339446	4019502339453	4019502339460
Order no.		402406	402408	402410	402412	402414	402416

For an explanation of working/standing/reach height see on page 5.

### Spare part:

- › Spare parts set hinges, order no. 0052872, see on page 151.