




## 6576 Mobile stairway tower complying with EN 1004

Frame section width	1.50 m
Platform length	1.90 m
Reach height	4.25 – 14.25 m
Tower height	3.30 – 13.30 m
Standing height	2.25 – 12.25 m

- › Short, very compact design.
- › Safe and easy internal ascent, even carrying tools or building materials.
- › Step angle 55°, step depth 150 mm.
- › Considerably increased safety during assembly and dismantling through the stairs being attached at every floor for passing on and assembling the individual elements.
- › Set-up in stairways possible.
- › Permissible load: 300 kg (3,0 kN) distributed load, corresponds to 150 kg/m<sup>2</sup> (1,5 kN/m<sup>2</sup>), according to tower group 2, DIN EN 1004.



### Note:

Every tower is accompanied by instruction manual for assembly and use. The number of additional parts required for fastening to the wall or ballasting may be found in the ballasting tables below.

### Additional parts required:


- › Ballast 10 kg, order no. 0050879
- › Ballast 15 kg, order no. 0050985
- › Wall connector, order no. 607141

Ballasting 6576				
Order no.	kg	kg	kg	kg
657604	0	0	0	0
657606	0	0	0	20*
657608	0	20*	40	100*
657610	0	40*	not permissible	not permissible
657612	0	60*	not permissible	not permissible
657614	0	100*	not permissible	not permissible

\* With the use of two wall connectors 607141 no ballasting necessary.

## 6576 Assembling combinations with stabilisers

- › Frame section width 1.50 m
- › Platform length 1.90 m

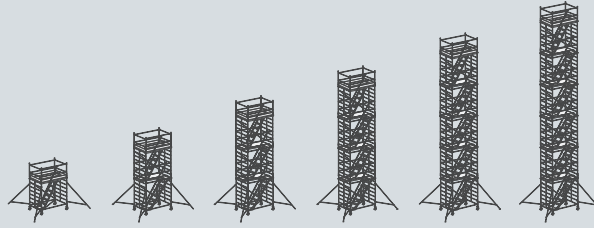

Order no.	Description	657604	657606	657608	657610	657612	657614	Length approx. m	Width approx. m	Weight approx. kg	
	Reach height approx. m	4.25	6.25	8.25	10.25	12.25	14.25				
	Tower height approx. m	3.30	5.30	7.30	9.30	11.30	13.30				
	Standing height approx. m	2.25	4.25	6.25	8.25	10.25	12.25				
<b>Individual elements/list of components</b>											
607322	8 rung frame section	2	4	6	8	10	12	2.15	1.50	12.5	
607923	2 rung guardrail section	2	2	2	2	2	2	1.00	1.50	3.8	
627624	Platform with trapdoor	1	1	1	1	1	1	1.90	0.65	13.0	
617724	Platform without trapdoor	1	2	3	4	5	6	1.90	0.65	14.5	
627340	Stairs	1	2	3	4	5	6	2.50	0.53	15.0	
0079632	Toeboard long side	2	2	2	2	2	2	1.65	0.15	2.7	
0079633	Toeboard front side	2	2	2	2	2	2	1.25	0.15	1.8	
0077268	Toeboard clip	4	4	4	4	4	4			0.2	
637827	Diagonal brace	1	2	3	4	5	6	2.45		2.5	
617828	Brace	6	11	16	21	26	31	1.90		2.1	
627329	Guardrail tube	1	2	3	4	5	6	2.80		4.5	
617342	Horizontal diagonal brace	1	1	1	1	1	1	2.30		3.0	
637136	Stabiliser	4	4	4	4	4	4	2.70	0.15	5.5	
007503	Castor Ø 150 mm with spindle <sup>3)</sup>	4	4	4	4	4	4			4.0	
007760	Safety plug	4	8	12	16	20	24			0.1	
0095538	Assembly instructions	1	1	1	1	1	1				
<b>Total weight</b>	<b>approx. kg</b>	<b>145.9</b>	<b>218.3</b>	<b>290.7</b>	<b>363.1</b>	<b>435.5</b>	<b>507.9</b>				

<sup>3)</sup> Alternatively: Castor Ø 200 mm with spindle, order no. 637150, see on page 133.

According to EN 1004, standing heights of 8 m and more are permissible only in the interior.